



NEEDLE VALVE WITH DRAIN


CONNECTIONS			DIMENSIONS			MODEL
INLET	OUTLET	DRAIN	A	B	C	
1/2" NPT F	1/2" NPT F	1/4" NPT F	32	89	105	1VSP8

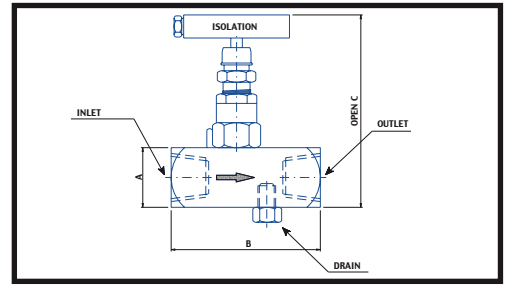


CONNECTIONS			DIMENSIONS			MODEL
INLET	OUTLET	DRAIN	A	B	C	
1/2" NPT M	1/2" NPT F	1/4" NPT F	32	100	105	2VSP8

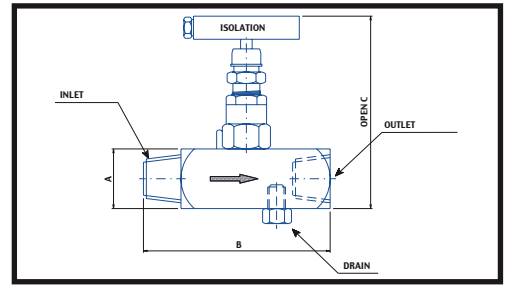


CONNECTIONS			DIMENSIONS			MODEL
INLET	OUTLET	DRAIN	A	B	C	
1/2" NPT F	1/2" NPT M	1/4" NPT F	32	100	105	3VSP8

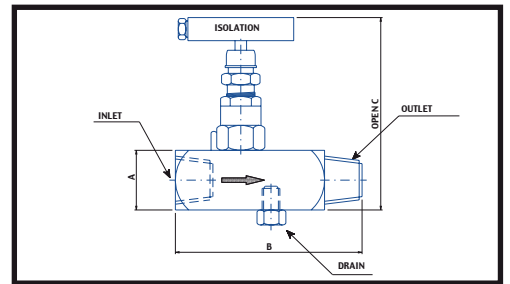

CONNECTIONS			DIMENSIONS			MODEL
INLET	OUTLET	DRAIN	A	B	C	
1/2" NPT M	1/2" NPT F	M8	32	100	105	5VSP8

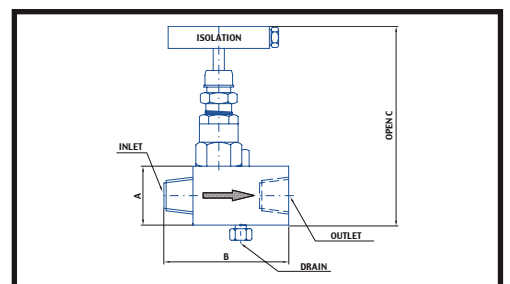

CONNECTIONS				DIMENSIONS			MODEL
INLET	OUTLET	TEST	DRAIN	A	B	C	
1/2" NPT M	1/2" NPT F	FLANGED ø40 mm	M8	32	72	105	6VSP8

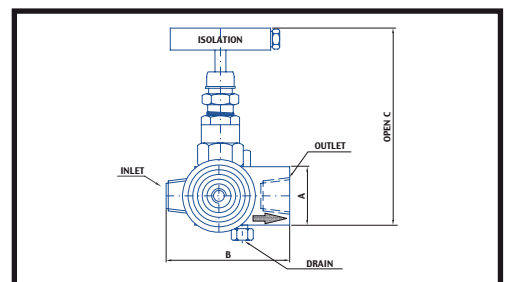

Pressure rating: 6000 psi
Material: A105, AISI 316/L, Monel, Hastelloy, ...

Gland Packing: PTFE (for temperature up to 180 °C)
 Graphoil (for temperature over 180 °C)