


## 3D2

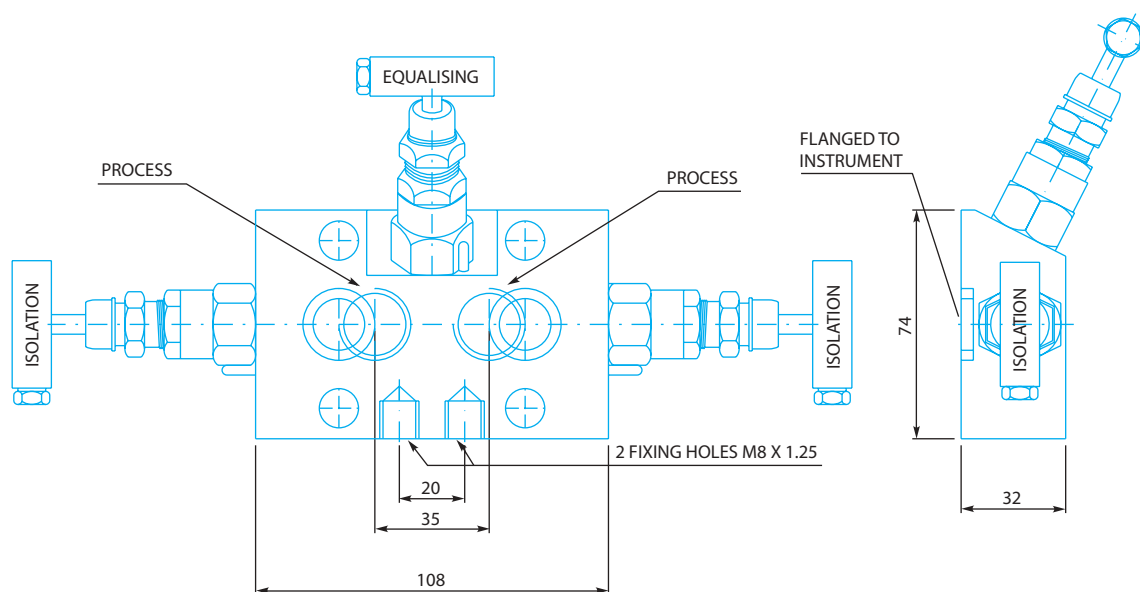

**Description:** 3 valves manifold – direct mounting  
**Descripción:** Manifold 3 valvulas – montaje directo  
**Description:** Manifold 3 vannes – montage direct

**Connections:** Process: 1/2" NPT-F  
 Instrument: flanged (direct mounting)

**Conexiones:** Proceso: 1/2" NPT-F  
 Instrumento: bridada (montaje directo)

**Connections:** Process: 1/2" NPT-F  
 Instrument: bridè (montage direct)

**Pressure rating:**  
**Presión de servicio:** 6000 psi  
**Pression:**

**Material:**  
**Material:** A105, AISI 316/L, Monel, Hastelloy, ...  
**Matériaux:**

**Gland Packing:** PTFE (for temperature up to 180 °C)  
 Graphoil (for temperature over 180 °C)  
**Estopada:** PTFE (para temperatura hasta 180 °C)  
 Graphoil (para temperatura mas de 180 °C)

**Guarniture:** PTFE (pour temperature jusqu'à 180 °C)  
 Graphoil (pour temperature plus de 180 °C)

**Accessories:** Q.ty 4 7/16" UNF mounting bolts  
**(included)** Q.ty 2 PTFE sealing ring

**Accesorios:** C.tad 4 7/16" UNF bulones de montajes  
**(incluido)** C.tad 2 PTFE junta de sello

**Accessoires:** Q.tè 4 7/16" UNF boulon d'assemblage  
**(inclus)** Q.tè 2 PTFE joints de brides

**Model:**  
**Modelo:** 3D2  
**Modèle:**