
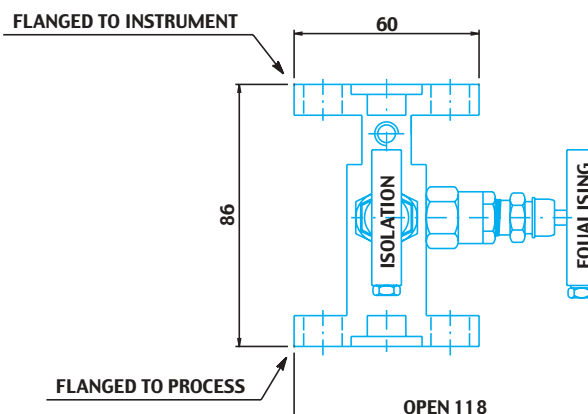


# 3D4

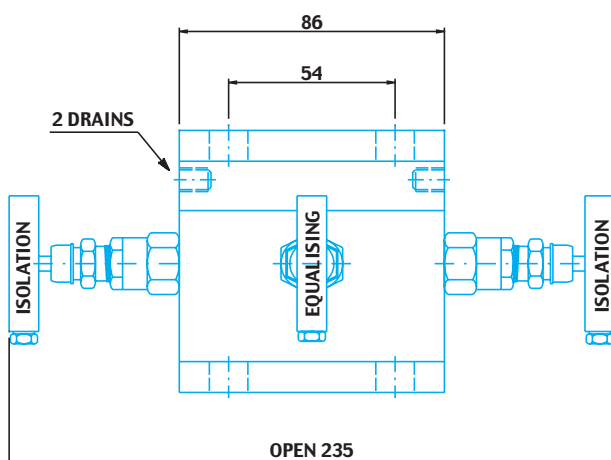

**Description:** 3 valves manifold – direct mounting  
**Descripción:** Manifold 3 valvulas – montaje directo  
**Description:** Manifold 3 vannes – montage direct

**Connections:** Process: flanged  
 Instrument: flanged  
 Drain: 1/4" NPT-F + plug  
**Conexiones:** Proceso: bridada  
 Instrumento: bridada  
 Purga: 1/4" NPT-F + tapones  
**Connections:** Process: bridè  
 Instrument: bridè  
 Purga: 1/4" NPT-F + bouchon

**Pressure rating:**  
**Presión de servicio:** 6000 psi  
**Pression:**

**Material:**  
**Material:** A105, AISI 316/L, Monel, Hastelloy, ...  
**Matériaux:**

**Gland Packing:** PTFE (for temperature up to 180 °C)  
 Graphoil (for temperature over 180 °C)  
**Estopada:** PTFE (para temperatura hasta 180 °C)  
 Graphoil (para temperatura mas de 180 °C)  
**Guarniture:** PTFE (pour temperature jusqu'à 180 °C)  
 Graphoil (pour temperature plus de 180 °C)

**Accessories:** Q.ty 4 7/16" UNF mounting bolts  
 Q.ty 2 PTFE sealing ring  
**Accesorios:** C.tad 4 7/16" UNF bulones de montajes  
 C.tad 2 PTFE junta de sello  
**Accessoires:** Q.tè 4 7/16" UNF boulon d'assemblage  
 Q.tè 2 PTFE joints de brides

**Model:**  
**Modelo:** 3D4  
**Modèle:**