


# 5D1

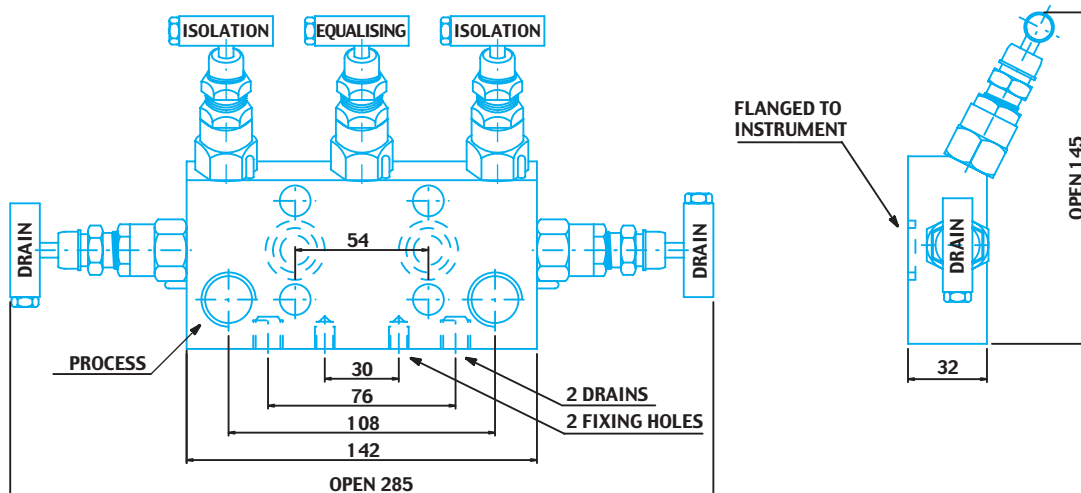

<b>Description:</b>	5 valves manifold – direct mounting
<b>Descripción:</b>	Manifold 5 valvulas – montaje directo
<b>Description:</b>	Manifold 5 vannes – montage direct
<b>Connections:</b>	Process: 1/2" NPT-F Instrument: flanged (direct mounting) Drain: 1/4" NPT-F + plug
<b>Conexiones:</b>	Proceso: 1/2" NPT-F Instrumento: bridadada (montaje directo) Purga: 1/4" NPT-F + tapon
<b>Connections:</b>	Process: 1/2" NPT-F Instrument: bridè (montage direct) Purge: 1/4" NPT-F + bouchon
<b>Pressure rating:</b>	
<b>Presión de servicio:</b>	6000 psi
<b>Pression:</b>	

<b>Material:</b>	A105, AISI 316/L, Monel, Hastelloy, ...
<b>Material:</b>	
<b>Materiaux:</b>	
<b>Gland Packing:</b>	PTFE (for temperature up to 180 °C) Graphoil (for temperature over 180 °C)
<b>Estopada:</b>	PTFE (para temperatura hasta 180 °C) Graphoil (para temperatura mas de 180 °C)
<b>Guarniture:</b>	PTFE (pour temperature jusqu'à 180 °C) Graphoil (pour temperature plus de 180 °C)
<b>Accessories:</b>	Q.ty 4 7/16" UNF mounting bolts Q.ty 2 PTFE sealing ring
<b>Accesorios:</b>	C.tad 4 7/16" UNF bulones de montajes C.tad 2 PTFE junta de sello
<b>Accessoires:</b>	Q.tè 4 7/16" UNF boulon d'assemblage Q.tè 2 PTFE joints de brides

<b>Model:</b>	
<b>Modelo:</b>	5D1
<b>Modèle:</b>	